

# Victaulic® FireLock™ Rigid Coupling

## Style 009N



Patented

### 1.0 PRODUCT DESCRIPTION

#### Available Sizes

- 1 ¼ – 12"/32 – 300 mm

#### Pipe Material

- Carbon steel, Schedule 10, Schedule 40. For use with alternative materials and wall thicknesses please contact Victaulic.

#### Maximum Working Pressure

- Up to 365 psi/2517 kPa.

#### Function

- Joins carbon steel pipe.
- Provides a rigid pipe joint designed to restrict axial or angular movement.

### 2.0 CERTIFICATION/LISTINGS



C104-1a/36

EN 10311  
Regulation (EU)  
No. 305/2011

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

System No.		Location	
Submitted By		Date	

Spec Section		Paragraph	
Approved		Date	

### 3.0 SPECIFICATIONS – MATERIAL

---

**Housing:** Ductile iron conforming to ASTM A 536, Grade 65-45-12. Ductile iron conforming to ASTM A 395, Grade 65-45-15, is available upon special request.

**Housing Coating: (specify choice)**

- Orange enamel (North America, Asia Pacific)
- Red enamel (Europe)
- Hot dipped galvanized

**Gasket: (specify choice<sup>1</sup>)**

**Grade “E” EPDM (Type A)**

FireLock EZ products have been Listed by Underwriters Laboratories Inc., Underwriters Laboratories of Canada Limited, and Approved by Factory Mutual Research for wet and dry (oil free air) sprinkler services within the rated working pressure.

<sup>1</sup> Services listed are General Service Guidelines only. It should be noted that there are services for which these gaskets are not compatible. Reference should always be made to the latest [Victaulic Gasket Selection Guide](#) for specific gasket service guidelines and for a listing of services which are not compatible.

**Bolts/Nuts: (specify choice<sup>2</sup>)**


Standard: Carbon steel oval neck track bolts meeting the physical and chemical requirements of ASTM A449 (imperial) and ISO 898-1 Class 9.8 (metric). Carbon steel hex nuts meeting the physical and chemical requirements of ASTM A563 Grade B (imperial - heavy hex nuts) and ASTM A563M Class 9 (metric - hex nuts). Track bolts and hex nuts are zinc electroplated per ASTM B633 ZN/FE5, finish Type III (imperial) or Type II (metric).

Optional: Stainless steel oval neck track bolts meeting the requirements of ASTM F593, Group 2 (316 stainless steel), condition CW. Stainless steel heavy hex nuts meeting the requirements of ASTM F594, Group 2 (316 stainless steel), condition CW, with galling-resistant coating.<sup>2</sup>

<sup>2</sup> Optional bolts/nuts are available in imperial size only.

## 4.0 DIMENSIONS

### Style 009N

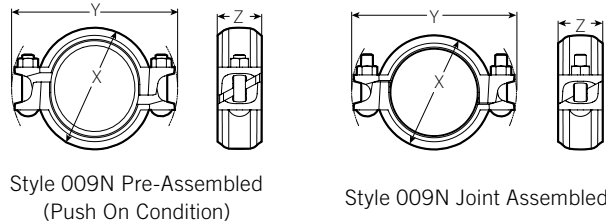

Nominal Size	Actual Outside Diameter	Maximum Working Pressure <sup>3</sup>	Maximum End Load <sup>3</sup>	Allow. Pipe End Separation <sup>4</sup>	Qty.	Bolt/Nut Size	Dimensions					Weight Approx. (Each)
							Pre-assembled (Push On Condition)		Joint Assembled			
							X	Y	X	Y	Z	
1 ¼ 32	1.660 42.4	365 2517	790 3514	0.10 2.54	2	¾ × 2 M10 × 51	3.13 79	5.00 127	2.75 70	5.00 127	2.00 51	1.4 0.6
1 ½ 40	1.900 48.3	365 2517	1035 4604	0.10 2.54	2	¾ × 2 M10 × 51	3.38 86	5.13 130	3.00 76	5.13 130	2.00 51	1.5 0.7
2 50	2.375 60.3	365 2517	1616 7193	0.12 3.05	2	¾ × 2 ½ M10 × 63	4.00 102	5.63 143	3.50 89	5.63 143	2.00 51	1.9 0.9
2 ½ 65	2.875 73.0	365 2517	2370 10542	0.12 3.05	2	¾ × 2 ½ M10 × 63	4.50 114	6.13 156	4.00 102	6.13 156	2.00 51	2.1 1.0
76.1 mm	3.000 76.1	365 2517	2580 11476	0.12 3.05	2	¾ × 2 ½ M10 × 63	4.63 118	6.00 152	4.13 105	6.13 156	2.00 51	2.1 1.0
3 80	3.500 88.9	365 2517	3512 15622	0.12 3.05	2	¾ × 2 ½ M10 × 63	5.13 130	6.75 171	4.63 117	6.75 171	2.00 51	2.3 1.0
4 100	4.500 114.3	365 2517	5805 25822	0.17 4.32	2	¾ × 2 ½ M10 × 63	6.00 152	7.88 200	5.63 143	7.50 191	2.13 54	2.9 1.3
108.0 mm	4.250 108.0	365 2517	5175 23020	0.17 4.32	2	¾ × 2 ½ M10 × 63	5.63 152	7.38 187	5.38 137	7.38 187	2.13 54	3.1 1.4
5 125	5.563 141.3	365 2000	8870 39456	0.17 4.32	2	½ × 3 M12 × 76	7.25 184	9.25 235	6.75 171	9.13 232	2.25 57	5.0 2.3
133.0 mm	5.250 133.0	365 2517	7897 35106	0.17 4.32	2	½ × 3 M12 × 76	6.63 168	9.00 229	6.38 162	9.00 229	2.25 57	4.8 2.2
139.7 mm	5.500 139.7	365 2517	8667 38529	0.17 4.32	2	½ × 3 M12 × 76	6.88 175	9.25 235	6.75 171	9.13 232	2.25 57	4.9 2.2
159.0 mm	6.250 159.0	365 2517	11192 49753	0.17 4.32	2	½ × 3 ¼ M12 × 83	7.88 200	10.00 254	7.38 187	9.88 251	2.25 57	5.6 2.5
165.1 mm	6.500 165.1	365 2517	12105 53813	0.17 4.32	2	½ × 3 ¼ M12 × 83	8.00 203	10.25 260	7.75 197	10.13 257	2.25 57	6.0 2.7
6 150	6.625 168.3	365 2000	12582 44469	0.17 4.32	2	½ × 3 ¼ M12 × 83	8.38 213	10.38 264	7.88 200	10.13 257	2.25 57	6.0 2.7
216.0 mm	8.500 216.0	365 2517	20712 59968	0.17 4.32	2	¾ × 4 M16 × 101	10.63 270	13.25 337	10.25 260	10.13 257	2.63 67	11.4 5.2
8 200	8.625 219.1	365 1620	21326 94863	0.17 4.32	2	¾ × 4 M16 × 101	10.88 276	13.38 340	10.25 260	13.13 333	2.50 64	11.4 5.2
10 250	10.750 273.0	300 2068	27229 121121	0.25 6.4	2	7/8 × 6 ½ M22 × 165	13.75 349	17.00 432	13.25 337	17.13 435	2.75 70	22.6 10.3
12 300	12.750 323.9	300 2068	38303 170380	0.25 6.4	2	7/8 × 6 ½ M22 × 165	16.00 406	19.00 483	15.50 394	19.13 486	2.75 70	27.6 12.5

<sup>3</sup> Working Pressure and End Load are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, standard roll or cut grooved in accordance with Victaulic specifications. See the Listings/Approvals section of this publication for ratings on other pipe.

<sup>4</sup> The allowable pipe separation dimension shown is for system layout purposes only. FireLock EZ™ couplings are considered rigid connections and will not accommodate expansion or contraction of the piping system.

#### NOTES

- When assembling FireLock EZ™ couplings onto end caps, take additional care to make certain the end cap is fully seated against the gasket end stop. For FireLock EZ™ Style 009N couplings, use FireLock No. 006 end caps containing the “EZ” marking on the inside face or No. 60 end caps containing the “QV EZ” marking on the inside face. Non-Victaulic end cap products shall not be used with Style 009N couplings. IMPORTANT: Gaskets intended for the Style 009 or Style 009V couplings cannot be used with the Style 009N coupling. There is no interchanging of gaskets or housings between coupling styles.
- Use Of Flushseal Gaskets For Dry Pipe Systems** FireLock EZ™ couplings are supplied with FireLock EZ™ Grade “E” Type A gaskets. These gaskets include an integral pipe stop, that once installed provides the similar benefits as a FlushSeal gasket for dry pipe systems. It should be noted that standard Victaulic Flush-Seal™ gaskets are not compatible and cannot be used with the FireLock EZ™ couplings.

## 5.0 PERFORMANCE<sup>6</sup>

### Listings/Approval

The information provided below is based on the latest listing and approval data at the time of publication. Listings/Approvals are subject to change and/or additions by the approvals agencies. Contact Victaulic for performance on other pipe and the latest listings and approvals.

Nominal Size inches mm	cULus <sup>11</sup>			FM			Vds	LPCB
	Sch. 5 psi kPa	Sch. 10 psi kPa	Sch. 40 psi kPa	Sch. 5 psi kPa	Sch. 10 psi kPa	Sch. 40 psi kPa	psi kPa	psi kPa
1 ¼ 32	232 1600	365 2517	365 2517	175 1205	363 2502	363 2502	363 2500	363 2500
1 ½ 40	232 1600	365 2517	365 2517	175 1205	363 2502	363 2502	363 2500	363 2500
2 50	363 2502	365 2517	365 2517	175 1205	363 2502	363 2502	363 2500	363 2500
2 ½ 65	N/A	365 2517	365 2517	175 1205	363 2502	363 2502	363 2500	363 2500
76.1 mm	N/A	365 <sup>6</sup> 2517 <sup>6</sup>	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	363 2500	363 2500
3 80	N/A	365 2517	365 2517	175 1205	363 2502	363 2502	363 2500	363 2500
4 100	N/A	365 2517	365 2517	175 1205	363 2502	363 2502	363 2500	363 2500
108.0 mm	N/A	N/A	N/A	175 1205	363 2502	363 2502	N/A	N/A
5 125	N/A	290 2000	365 2517	N/A	363 2502	363 2502	232 1600	N/A
133.0 mm	N/A	N/A	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	N/A	N/A
139.7 mm	N/A	290 <sup>8</sup> 2000 <sup>8</sup>	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	232 1600	N/A
159.0 mm	N/A	N/A	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	N/A	N/A
165.1 mm	N/A	290 <sup>9</sup> 2000 <sup>9</sup>	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	N/A	N/A
6 150	N/A	290 2000	365 2517	N/A	363 2502	363 2502	232 1600	N/A
216.0 mm	N/A	N/A	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	N/A	N/A
8 200	N/A	290 2000	365 2517	N/A	363 2502	363 2502	232 1600	N/A
216.0 mm	N/A	N/A	N/A	N/A	363 <sup>7</sup> 2502 <sup>7</sup>	N/A	N/A	N/A
8 200	N/A	290 2000	365 2517	N/A	363 2502	363 2502	232 1600	N/A
10 250	N/A	300 2068	300 2068	N/A	300 2068	300 2068	N/A	N/A
12 300	N/A	300 <sup>10</sup> 2068 <sup>10</sup>	300 2068	N/A	250 1724	300 2068	N/A	N/A

<sup>5</sup> Listed/Approved for wet and dry pipe systems (> -40°F/-40°C) for continuous use in freezing conditions, use of Style 005H Coupling with Silicone Gasket is recommended. Please see the Victaulic [Installation Manual I-009N/009H](#) for details concerning when supplemental lubrication is required.

<sup>6</sup> cULus listed for DIN 2458 2.6 mm pipe wall.

<sup>7</sup> FM approved for BS 1387 Medium 3.6 mm pipe wall.

<sup>8</sup> cULus listed for EN 10220 4.0 mm pipe wall.

<sup>9</sup> cULus listed for EN 10255 4.5 mm pipe wall.

<sup>10</sup> cUL listed to 250 psi.

<sup>11</sup> With optional stainless steel fasteners, cULus Listed to 175psi. The stainless steel fasteners have a marking designation of "316" on the end face of the bolt.

## 5.1 PERFORMANCE<sup>2</sup>

### Listings/Approval Speciality Pipe

Pipe	Size inches	Pressure Rating		Pipe	Size inches	Pressure Rating		Pipe	Size inches	Pressure Rating	
		cULus psi kPa	FM psi kPa			cULus psi kPa	FM psi kPa			cULus psi kPa	FM psi kPa
BLT	1 ¼ – 2	300 2068	365 2517	EZT	1 ¼ – 2	300 2068	365 2517	MT	1 ¼ – 2	300 2068	365 2517
DF	1 ¼ – 4	300 2068	365 2517	FF	1 ¼ – 4	300 2068	365 2517	MLT	1 ¼ – 2	N/A	365 2517
DT	1 ¼ – 2	300 2068	365 2517	FLF	1 ¼ – 4	N/A	365 2517	ST	1 ¼ – 2	N/A	365 2517
EF	1 ¼ – 4	175 1206	175 1206	FLT	1 ¼ – 2	N/A	365 2517	STF	1 ¼ – 4	N/A	365 2517
EL	1 ¼ – 2	300 2068	365 2517	FLTL	1 ¼ – 2	N/A	365 2517	TF	2 ¼ – 4	N/A	365 2517
ET40	1 ¼ – 2	300 2068	365 2517	GL	1 ¼ – 2	300 2068	365 2517	WLS	1 ¼ – 2	300 2068	365 2517
EZF	3 – 4	300 2068	365 2517	MF	1 ¼ – 4	300 2068	365 2517	WST	1 ¼ – 2	N/A	365 2517
					6	175 1205	175 1205	XL	1 ¼ – 2	300 2068	365 2517

#### NOTES

- BLT = BLT steel pipe manufactured by Allied Tube & Conduit Corp.
- DF = DYNA-FLOW steel pipe manufactured by Allied Tube & Conduit Corp.
- DT = DYNA-FLOW steel pipe manufactured by Allied Tube & Conduit Corp.
- EF = EDDY FLOW steel pipe manufactured by Bull Moose Tube Co.
- EL = EDDYLITE steel pipe manufactured by Bull Moose Tube Co.
- ET40 = Eddythread 40 steel pipe manufactured by Bull Moose Tube Co.
- EZF = EZ-Flow steel pipe manufactured by Northwest Pipe Co.
- EZT = EZ-Thread steel pipe manufactured by Youngstown Tube Co.
- FF = Fire-Flo steel pipe manufactured by Youngstown Tube Co.
- FLF = Fire-Line Flow steel pipe manufactured by Western International Forest Products Inc.
- FLT = Fire-Line Threadable steel pipe manufactured by Western International Forest Products Inc.
- FLTL = Fire-Line Threadable Light steel pipe manufactured by Western International Forest Products Inc.
- GL = GL steel pipe manufactured by Wheatland Tube Co.
- MF = Mega-Flow steel pipe manufactured by Wheatland Tube Co.
- MT = Mega-Thread steel pipe manufactured by Wheatland Tube Co.
- MLT = MLT steel pipe manufactured by Wheatland Tube Co.
- ST = STD wall pipe in accordance with ASTM A53.
- STF = Steady Flow steel pipe manufactured by AMS Tube Corp.
- TF = Tex-Flow steel pipe manufactured by Tex-Tube Co.
- WLS = WLS steel pipe manufactured by Wheatland Tube Co.
- WST = WST steel pipe manufactured by Wheatland Tube Company.
- XL = XL steel pipe manufactured by Allied Tube & Conduit Corp.

---

## 6.0 NOTIFICATIONS

---

Not applicable – contact Victaulic with any questions.

---

## 7.0 REFERENCE MATERIALS

---

[05.01: Seal Selection Guide](#)

[I-009N/009H](#): Installation Instructions FireLock EZ™ Rigid Coupling

---

### User Responsibility for Product Selection and Suitability

Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

### Intellectual Property Rights

No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

### Note

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

### Installation

Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at [www.victaulic.com](http://www.victaulic.com).

### Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

### Trademarks

*Victaulic* and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.

---