

order reference

34333/05 (< 5 bar@20 °C)

order reference ²⁾

34333/15 (≙ 15 bar@20 °C) ¹⁾


34333/30 (≙ 30 bar@20 °C) ¹⁾

34333/40 (≙ 40 bar@20 °C) ¹⁾

34333/60 (≙ 60 bar@20 °C) ¹⁾

technical details

material	316L
max. operating pressure ¹⁾	5; 15; 30; 40; 60 bar@20 °C
max. test pressure ¹⁾	5; 15; 30; 40; 60 bar@20 °C
min. density	0.64 g/cm ³
pipe min. ID	28/32 mm
theo. immersion depth E	318.3 mm
eff. immersion depth E'	see diagram

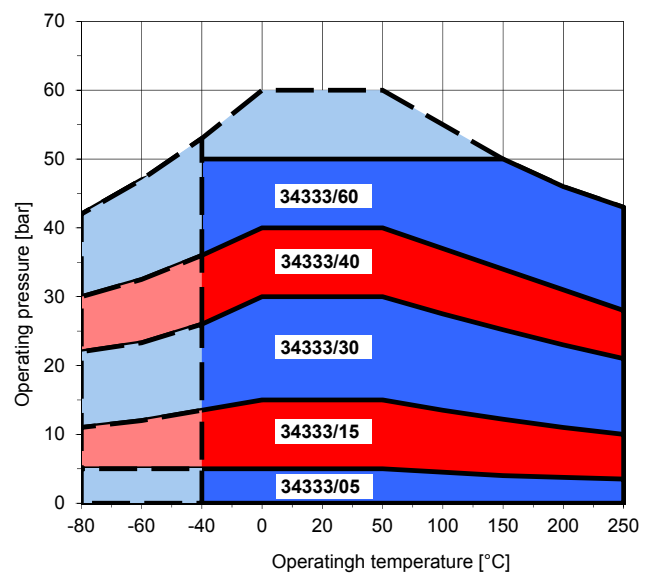

commentary

¹⁾ corresponds max. operating/test pressure in bar

²⁾ 34333/15; 30; 40 und 60 = preload pressure in bar